
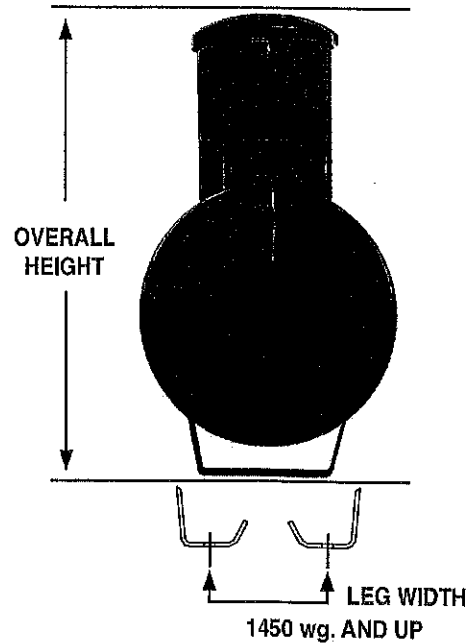


# UNDERGROUND TANKS (UG)

Consult our dimension and specification chart below to find the tank that best fits your needs. Visit our website at [www.propanetank.com](http://www.propanetank.com) for more information.

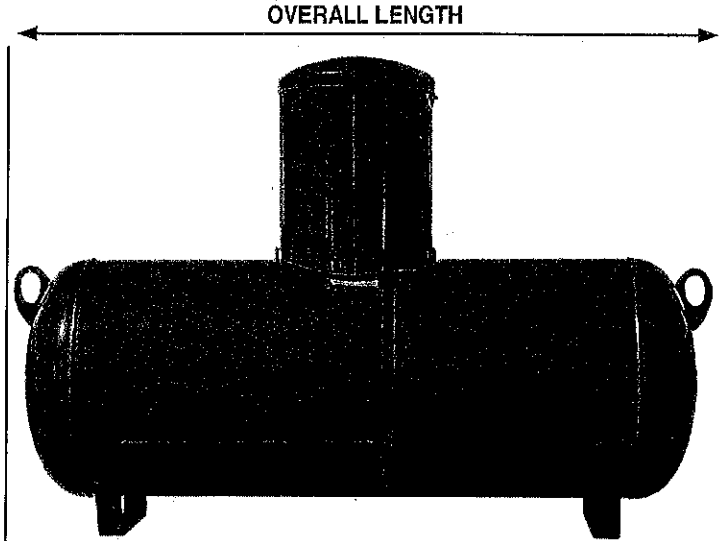

## APPROXIMATE UNDERGROUND VESSEL DIMENSIONS AND SPECIFICATIONS

WATER CAPACITY	DIAMETER (OD)	HEAD TYPE	OVERALL LENGTH	OVERALL HEIGHT		LEG** WIDTH	WEIGHT (lbs.)	***QUANTITY	
				UGSR	UGLR			FULL LOAD	PER STACK
120 wg.	24"	Ellip.	5'-8"	3'-10"	4'-5"	1'-1 1/2"	260	48   60	6   10
250 wg.	30"	Hemi.	7'-10"	4'-6"	5'-1"	1'-5"	480	30   42	5   7
320 wg.	30"	Hemi.	9'-7"	4'-6"	5'-1"	1'-5"	620	25   35	5   7
500 wg.	37 1/2"	Hemi.	10'	5'	5'-7"	1'-8"	950	25	5
1000 wg.	41"	Hemi.	16'	5'-3"	5'-10"	1'-8"	1,800	15	5
1450 wg.	46 1/2"	Ellip.	17'-4"	5'-9"	6'-4"	1'-9"	2,650	12	4
1990 wg.	46 1/2"	Ellip.	23'-11"	5'-9"	6'-4"	1'-9"	3,550	8	4

Dimensions and specifications shown are approximate. Individual vessels may vary.

\* Dual lifting lugs for 500 and 1000 wg. standard tanks.

\*\* Leg widths and spacing may vary based on mfg. location. Check with your salesperson for details. 120, 250, 320 wg. standard tanks - no holes in legs (one center hole on request). 500 and 1000 wg. standard tanks - 2 holes 16" on center. 1450 wg. and up as shown above.

\*\*\* Full load and stack quantities vary by shipping location. Check with your salesperson for details.

Applicable federal, state, or local regulations may contain specific requirements for protective coatings and cathodic protection. The purchaser and installer are responsible for compliance with all federal, state, local and NFPA industry regulations, including proper purging for first fill per NPGA 133-89(a). Cathodic protection required. Coating must be continuous and uninterrupted and must comply with an local, state or national code.



**HOME OFFICE**  
2914 U.S.61  
Cleveland, MS 38732  
800-345-2495

**OHIO LOCATION**  
721 Graham Drive  
Fremont, OH 43420  
419-334-2664

**UTAH LOCATION**  
5601 Axel Park Rd.  
West Jordan, UT 84081  
801-280-1133